

# RELAY UNIT

## 4-Way Relay Unit

### Features


- ▶ 4x 24V DC operated inputs
- ▶ 4x Mains rated relays
- ▶ Relay status LED indicators
- ▶ Isolate switches for each relay
- ▶ Two changeover contacts per relay (normally open & normally closed)
- ▶ Can be configured to provide control from up to four Control Panels
- ▶ Spring leaf 2.5mm capacity terminals
- ▶ Sheet steel enclosure, complete with cable entry knockouts



### Description

Housed in a robust sheet steel enclosure, the 4-Way Relay Unit features 4 pairs of 240V AC mains rated relay contacts that can be operated using switch negative signals from up to 4 control panels.

Isolate switches and status LED's are provided for each relay.

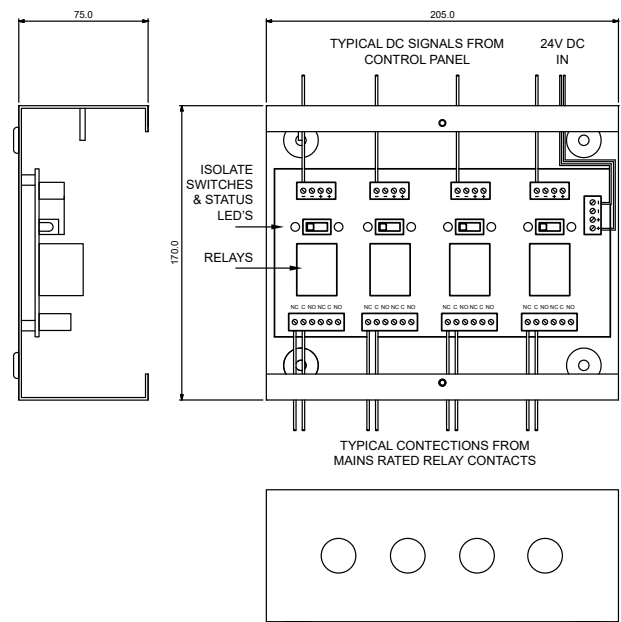

### Specification

Part Number	K143031
Construction	1.2mm mild sheet steel
IP Rating	IP30
Finish	Epoxy powder coated
Colour - lid & box	BS 00-A-05 grey - fine texture
Weight	1Kg
Input voltage	24V DC (38 mA)
Output Contacts	250V AC (5A Max.)
Operating temperature	-5°C to +50°C
Operating humidity	To 95% non-condensing

Datasheet DS107/04/17

For further information visit [www.kentec.co.uk](http://www.kentec.co.uk)

Kentec Electronics Ltd. reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Kentec Electronics Ltd. to be a complete and up-to-date description.