


TAKTIS FIRE

4-Way Sounder Card

Features

- ▶ Simple 'plug-in' connection to the Taktis Control Panel
- ▶ 4 sounder outputs
- ▶ Fault and operated LED on board indicators
- ▶ Decals provided to re-designate Taktis terminals

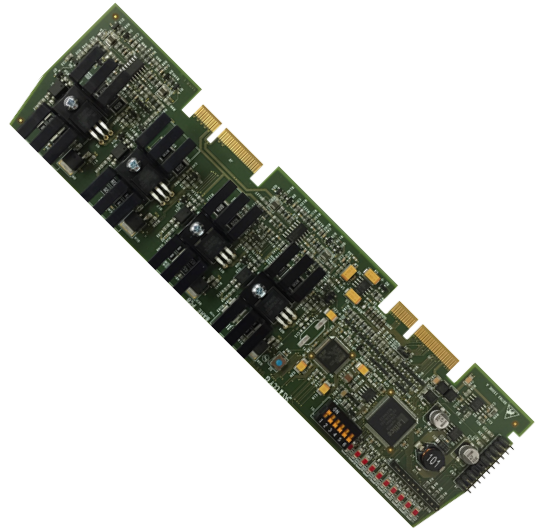

Description

To further enhance the versatility of the Taktis Control Panel, the 4-Way Sounder Card can be added to provide additional sounder output capability. Each Card features 4 monitored sounder outputs, which can be individually programmed.

Specification

Product Code	K793
Supply Voltage	21 - 30V DC
End of line device	Diode (1N4001)
Quiescent current consumption	30mA
Full alarm current consumption	50mA (exclude current draw on sounder outputs)
Current per sounder output	1A per channel (2.5A maximum over all four channels)
PCB size	62.8mm x 234.6mm
Cable capacity	2.5mm ² per terminal (Taktis main/extender board)
Operating temperature	-5°C to +40°C (±2°C)
Operating humidity	<95% (non-condensing)
Configuration	4 x radial (class "B"), or 2 x loop (class "A")
Packaged weight	1Kg

For full technical and application details see the Taktis Additional Cards Installation Manual.