


TAKTIS FIRE

Media Gateway™ Card

Features

- ▶ Permits Ockular®, Virtual Resource & Vizulinx™ integration
- ▶ Interface for third-party IP capable networks & equipment
- ▶ 'Plug-in' connection to the Taktis Fire Alarm Control Panel
- ▶ Standard RJ45 connection port
- ▶ Low current consumption

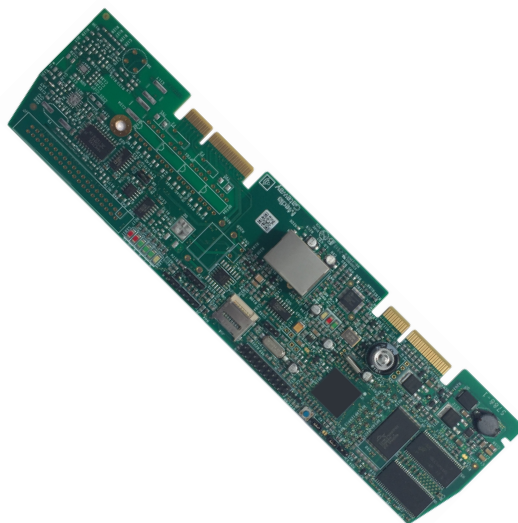

Description

The Media Gateway Card is a communication device for the Taktis Fire Alarm Control Panel. The Card facilitates seamless integration with other Kentec products such as the Ockular* Graphical Fire Management System, Virtual Resource and the Vizulinx Alarm Management Solution.

Utilising the Media Gateway Card also enables assimilation with third-party IP networks and equipment.

In common with other Additional Cards in the Taktis range, the Media Gateway Card features simple 'plug-in' connectivity and is fully configurable using Loop Explorer 2 software.

*Media Gateway Card supplied with Ockular as standard.

Specification

Product Code	K794
Supply Voltage	21 - 30V DC
Operating Current	114mA
Input Connection Port	RJ45
Taktis Connectivity	Slot 'F'
PCB Size	62.8mm x 234.6mm
Operating Temperature	-5°C to +49°C (+/- 2 ° C)
Operating Humidity	To 95% (non condensing)
Packaged Weight	1Kg