




TAKTIS FIRE

Media Gateway™ Card

Features

- ▶ 'Plug-in' connection to the Taktis Fire Alarm Control Panel
- ▶ Dual Line Dialler capability (SIA or Contact ID)
- ▶ IP capable (Sur-Gard Fibro)
- ▶ Programmable to report via Point or Zone
- ▶ Programmable for back-up reporting
- ▶ Report codes can be customised by user
- ▶ Standard RJ45 connection port
- ▶ Low current consumption

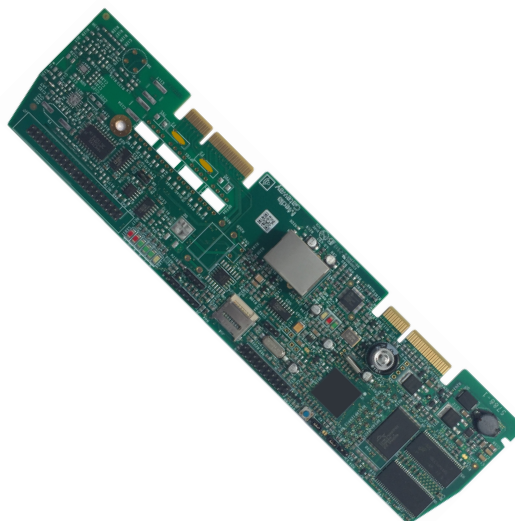

Description

The Media Gateway Card is a communication device for the Taktis Fire Alarm Control Panel.

The Card provides connectivity to a remote monitoring centre via Sur-Gard Fibro or dial-up. SIA is the recommended format for usage, however Contact ID is also supported. Transmission can be made through one or two telephone lines and /or IP through Ethernet. Standard reporting codes are pre-defined, although the user may customise codes through Loop Explorer 2 software.

Utilising the Media Gateway Card also enables assimilation with third-party IP networks and equipment.

In common with other Additional Cards in the Taktis range, the Media Gateway Card features simple 'plug-in' connectivity.

Specification

Product Code	S788
Supply Voltage	21 - 30V DC
Operating Current	114mA
Input Connection Port	RJ45
Taktis Connectivity	Slot 'F'
PCB Size	62.8mm x 234.6mm
Operating Temperature	-5°C to +49°C (+/- 2 ° C)
Operating Humidity	To 95% (non condensing)
Packaged Weight	1Kg